



# **Elec-Trak<sup>®</sup>**

GEH-3995

**Tractor**

## INSTRUCTIONS

### E12M IMPLEMENT MOUNTING BRACKET/LIFT BAR KIT

MODEL AP55

(REQUIRED ON E12M FOR MOUNTING OF EITHER SNOW/DOZER BLADE OR SNOW THROWER)

The KB48 Snow/Dozer Blade must be converted for use on the E12M Elec-Trak tractor with both:

- 1) The AP55 Implement Mounting Bracket and Lift Bar Kit, and
- 2) KB48 Snow/Dozer Blade Adapter Kit.

## Installation For Use With Snow/Dozer Blade

Before proceeding, install Snow/Dozer Blade Adapter Kit according to its accompanying instructions.

### THEN:

1. Hold the implement mounting bracket in front of the tractor similar to its attached position and move it towards the rear of the tractor so its front "ears" engage the tractor frame at either end of the bumper.
2. Align the mounting bracket holes with the corresponding frame bushings and secure with clevis pins and hair pin cotters so the clevis pin heads are towards the center of the tractor.
3. Attach snow/dozer blade to tractor as outlined in the instructions accompanying the blade, omitting lift strap threading instructions.
4. Attach slotted end of lift bar to tractor lift lever pin. Secure with washer and hair pin cotter. See Figure 1.
5. Move tractor lift handle forward so the second hole from the forward end of the lift bar aligns with the pin on the snow/dozer blade lift bracket. Secure bar to bracket with washer and hair pin cotter.
6. Lubricate all friction points with SAE 30 oil and the snow/dozer blade is ready for use. Refer to the instructions accompanying the blade for additional information on use and care.

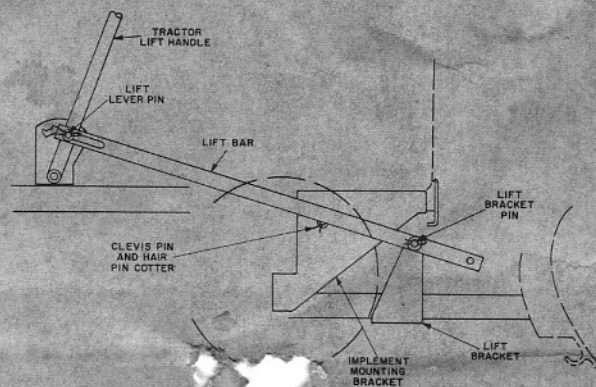


Figure 1  
Lift bar installation  
for snow/dozer blade



The AD42 Snow Thrower must be converted for use on the E12M Elec-Trak tractor. The two kits required are:

- 1) AP55 Implement Mounting Bracket/Lift Bar Kit, and
- 2) KB48 Snow/Dozer Blade Adapter Kit

## Installation For Use With Snow Thrower

Before proceeding, install Snow Thrower Adapter Kit according to its accompanying instructions.

### THEN:

1. Hold the implement mounting bracket in front of the tractor similar to its attached position and move it towards the rear of the tractor so its front "ears" engage the tractor frame at either end of the bumper.
2. Align the mounting bracket holes with the corresponding frame bushings and secure with clevis pins and hair pin cotters so the clevis pin heads are towards the center of the tractor.
3. Attach snow thrower to tractor as outlined in the instructions accompanying it, omitting lift strap threading instructions.
4. Attach slotted end of lift bar to pin on the snow thrower lift bracket. Secure bar to bracket with washer and hair pin cotter. See Figure 2.
5. Move tractor lift handle forward so the end hole in the lift bar aligns with the lift lever pin. Secure bar to pin with washer and hair pin cotter.
6. Lubricate all friction points with SAE 30 oil and the snow thrower is ready for use. Refer to the instructions accompanying the snow thrower for additional information on use and care.

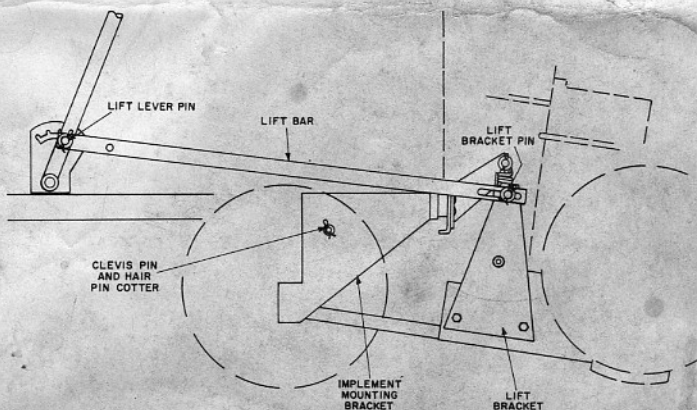


Figure 2  
Lift bar installation  
for snow thrower