



## INSTRUCTIONS

### 42" SNOW/DOZER BLADE

#### Model AB42

Implement Mounting Bracket AP54 must be used to attach the Snow/Dozer Blade to the E8M and E10M Elec-Trak tractors.

#### INITIAL ASSEMBLY

1. Attach the angling rod support and support bracket to the left foot rest. Secure with bolts, plain washers, lockwashers and nuts along the front row of holes in the foot rest in the order shown in Figure 1.

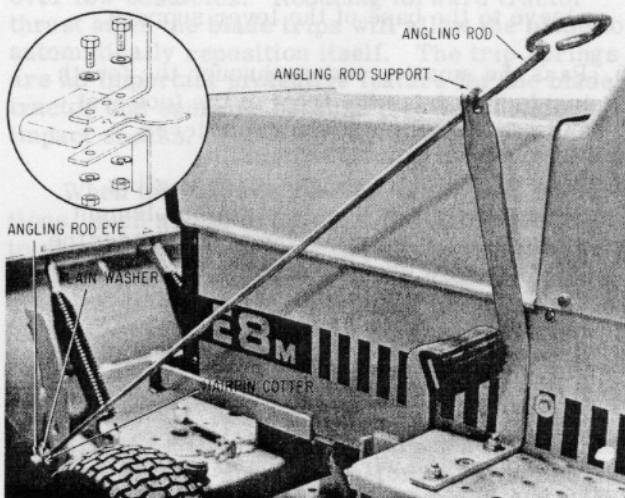


Figure 1

2. Attach the main blade to the push tube with the mounting rod using the lower pair of blade flange mounting holes. Secure the rod at the right end with a cotter pin. (The left end will be secured after the angling rod is attached.)
3. Secure the lift bracket to the bottom side of the push tube with bolts, lockwashers and nuts as shown in Figure 2.
4. Attach the trip springs between the pierced holes on the push tube and the top of the main blade. See Figure 3.

5. Complete installation and assembly as outlined under "Blade Attachment" instructions.

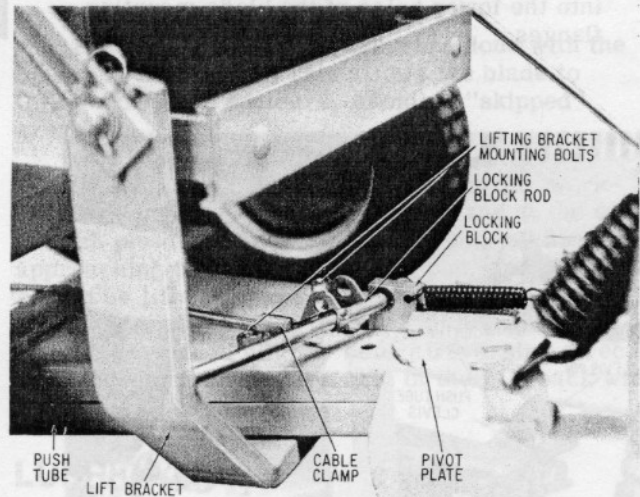


Figure 2

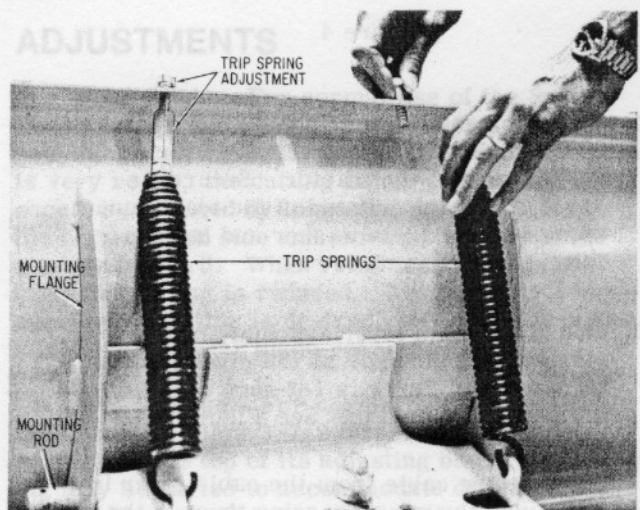


Figure 3

